

PRODUCT SPECIFICATIONS SHEET

CATEGORY | STRIPLIGHT LUMINAIRES



KEY FEATURES


- **Power levels:** 5W/m / 15W/m / 20W/m
- **Luminaire efficacy:** Up to 110lm/W.
- **Heatsink:** Aluminium.
- **Mounting:** Surface.
- **Luminaire colour options:** White / Black / Custom colour on request.
- **LED lifetime (L80B10):** >75 000 hrs.
- **Dimming options:** DALI, Bluetooth, Touch DIM, 1-10, Triac, PWM.
- Luminaire supplied with external driver.

PHOTOMETRICS

LUMINAIRE DATA	NAME	VOLTS (V)	DRAW POWER (W)	LENGTH (mm) (INCREMENTS OF 86mm)	LED COLOUR (CCT)	COLOUR RENDERING INDEX (CRI)
	M OKALA	24	5	94mm - 2076mm	3000K, 3500K, 4000K, 5700K	92
	M OKALA	24	15	94mm - 2076mm	3000K, 3500K, 4000K, 5700K	92
	M OKALA	24	20	94mm - 2076mm	3000K, 3500K, 4000K, 5700K	92

LUMINAIRE DATA	NAME	DRAW POWER (W)	WIDTH (mm)	HEIGHT (mm)	NOMINAL FLUX (LM/m)	LUMINAIRE EFFICACY (LM/W)	MAX CONNECTED LGTH (m)
	M OKALA	5	20	18	450 - 550	90 - 110	6
	M OKALA	15	20	18	1350 - 1650	90 - 110	6
	M OKALA	20	20	18	1800 - 2200	90 - 110	4

PHOTOMETRICS



MOKALA – ASYMMETRIC


FIXTURE FEATURES AND WARRANTY



IP20



5Year
WARRANTY

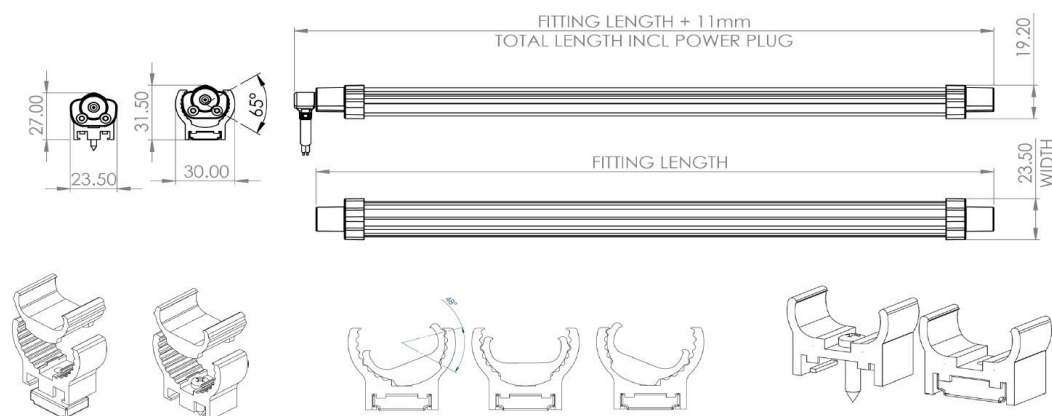

GENERAL SPECIFICATIONS

GENERAL SPECIFICATIONS	DESCRIPTION	SPECIFICATION
	LED chip type	Samsung / Vossloh Schwable
	LED operating voltage	24V
	LED working life (L80B10)	>75 000hrs @ Ta = 25 deg C
	Driver type	External
	Driver dimming	Non - dim / DALI / Bluetooth / Touch DIM / 1-10 / Triac / PWM
	IP rating	IP20
	SABS company certification	10089/ 15954
	Operating temperature range	0° C to + 40° C
	Hous ing material	Aluminium / PM M A

PRODUCT IMAGES



Perspective view

General Disclaimer

General Disclaimer
Content is subject to change. Fluctuations in mains voltage and in LED forward voltage mean that lumen output and power draw may be subject to deviation (+5%) of rated value.

Liability Disclaimer

Liability Disclaimer
The contents of this document are for information purposes only and may be subject to change without prior notice. LED Lighting SA can not be held liable for any direct or indirect damages as a result of this information.

Copyright©LED Lighting2019. All Rights Reserved.



CAPE TOWN

Head office

| 021 510 0028
| sales@ledlighting.co.za
| 1st Floor Hillwood House
25 Paarden Eiland Road
Paarden Eiland, 7405



JOHANNESBURG

Regional Branch

021 510 0028
sales@ledlighting.co.za
 Office Unit 1 Pendoring Office Park,
 299 Pendoring Rd, Blackheath,
 Randburg, 2195



DURBAN

Regional Branch

021 510 0028
sales@ledlighting.co.za